

10/530796

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
22 April 2004 (22.04.2004)

PCT

(10) International Publication Number  
WO 2004/033156 A1

(51) International Patent Classification<sup>7</sup>: B25B 13/10

(21) International Application Number:  
PCT/KR2003/002091

(22) International Filing Date: 10 October 2003 (10.10.2003)

(25) Filing Language: Korean

(26) Publication Language: English

(30) Priority Data:  
20-2002-0030200 10 October 2002 (10.10.2002) KR  
20-2003-0000387 7 January 2003 (07.01.2003) KR

(71) Applicant and

(72) Inventor: CHOI, Ock-Soon [KR/KR]; Shindoo-Ri 18-7,  
Yipjang-Myeon, Cheonan-Shi 330-826 (KR).

(74) Agent: CHO, Jae-Hyoung; Oriental Patent & Trademark  
Law Office, 809, Yoksam Heights Bldg., 642-19 Yoksam-  
dong, Kangnam-ku, Seoul 135-080 (KR).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,  
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,  
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: SPANNER

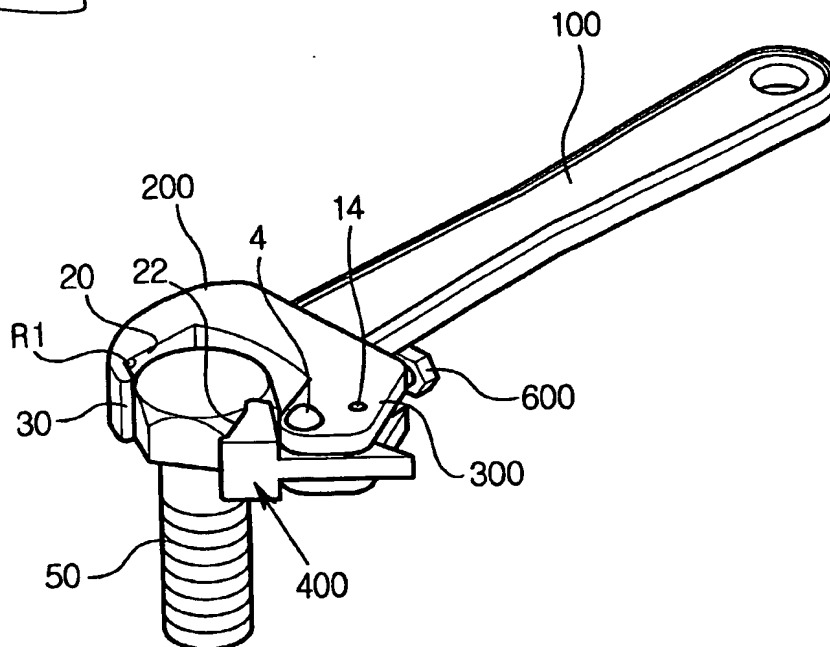

(57) Abstract: Disclosed is a spanner which is generally used as a typical tool for tightening or releasing a bolt. The spanner is capable of tightening or releasing a bolt continually in one direction by the effect of a toggle bar (400) pivotally mounted on a jaw of two jaws (200, 300) of the spanner head in a state that the toggle bar is urged to pivot toward one direction. A protrusion (30, 32) is formed on a distal end of the other jaw of the spanner head for gripping an angular portion of the bolt head so that it is possible to prevent the spanner head being readily disengaged from the bolt head.

WO 2004/033156 A1